



- ❖ EneC Driver ,Flicker Free
- ❖ Non-yellowing high efficiency Diffuser
- ❖ Suitable for Surface and Hanger Mounting
- ❖ 5 years warranty




Mechanical Specifications		Optical Specifications	
Body	Aluminum	Light Source	MidPower Led
Ip Rating	IP40	Reflector	-
IK Rating Body	IK 06	Lens	-
Ral Code	RAL 9005(Optional)	Diffuser	Opal
Cable Gland	-	CRI	>80
Cable	3x0.75 mm2	Colour Temperature	3000K / 4000K / 6500K
Fire Protection	650°C	Photobiological Risk Group	RG1
Mounting Type	Surface Mounting	Beam angle	120°
Electrical Specifications		Options	
Input Voltage	220-240 VAC	DALI	✓
Power Factor	>0.95	1-10 V	✓
System Lifetime	50000h	1 Hour Emergency Kit	✓
Class	I	3 Hour Emergency Kit	✓
Operating Temperature	-20°C / +45°C	Microvave Sensor	
Standards	LM79/LM80	Another Mounting Type	Hanging Wire

ERP Code	Ceiling Type	Power(W)	Efficiency(lm/W)	Luminous Flux(lm)	Colour Temp.	Dimensions (mm)	Cut Size	Pcs/Pack	Pack Weight(kg)	Accessory
1910029	Surface	36W	100	3600	3000K / 4000K / 6500K	50x70x1130		4	5,20	
1910030	Hanging	36W	100	3600	3000K / 4000K / 6500K	50x70x1130		4	5,20	Hanging Wire
1910031	Surface	50W	100	5000	3000K / 4000K / 6500K	50x70x1430		4	6,50	
1910032	Hanging	50W	100	5000	3000K / 4000K / 6500K	50x70x1430		4	6,50	Hanging Wire





### Technical Drawing Teknik Çizim

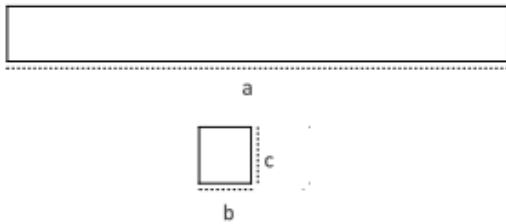

### Light Distribution Curve Işık Şiddeti Dağılım Eğrisi

