



- ❖ Enec Driver ,Flicker Free
- ❖ Non-yellowing high efficiency Diffuser
- ❖ Strong Surface Mounting Frame
- ❖ 5 years warranty



Mechanical Specifications		Optical Specifications	
Body	Metal	Light Source	MidPower Led
Ip Rating	IP40 (Optional IP44 and IP54)	Reflector	-
IK Rating Body	IK 06	Lens	-
Ral Code	RAL 9016	Diffuser	Opal PS
Cable Gland	-	CRI	>80
Cable	0,75 mm <sup>2</sup>	Colour Temperature	3000K / 4000K / 6500K
Fire Protection	650°C	Photobiological Risk Group	RG1
Mounting Type	Recessed Mounting	Beam angle	160°
Electrical Specifications		Options	
Input Voltage	220-240 VAC	DALI	✓
Power Factor	>0.95	1-10 V	✓
System Lifetime	50000h	1 Hour Emergency Kit	✓
Class	I	3 Hour Emergency Kit	✓
Operating Temperature	-20°C / +45°C	UGR <19	Optional (With Mic.Priz.Dif.)
Standards	LM79/LM80	Another Mounting Type	Surface-Mounted Apparatus


ERP Code	Ceiling Type	Power(W)	Efficiency(lm/W)	Luminous Flux(lm)	Colour Temp.	Dimensions (mm)	Cut Size(mm)	Pcs/Pack	Pack Weight(kg)	Accessory
1910001	Rock Wool	36W	110	3960	3000K / 4000K / 6500K	595x595x33		10	15	
1910002	Plaster Ceiling	36W	110	3960	3000K / 4000K / 6500K	595x595x33	570x570	10	15	Spring Acc.
1910003	Clip-in	36W	110	3960	3000K / 4000K / 6500K	600x600x33		10	17	
1910004	Rock Wool	20W	105	2100	3000K / 4000K / 6500K	295x295x33		20	9	
1910005	Plaster Ceiling	20W	105	2100	3000K / 4000K / 6500K	295x295x33	270x270	20	9	Spring Acc.
1910006	Clip-in	20W	105	2100	3000K / 4000K / 6500K	300x300x33		20	10	





### Technical Drawing

Teknik Çizim

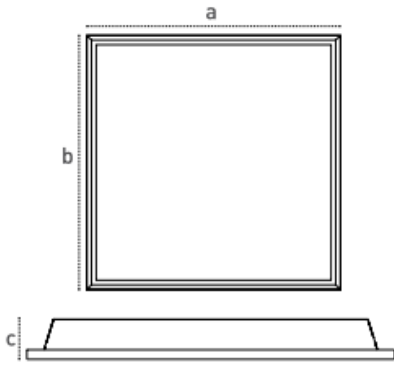

### Light Distribution Curve

Işık Şiddeti Dağılım Eğrisi

